



**KODIAK
CONTROLS®
INC.**

KODIAK KC203 SERIES PRESSURE GAUGE

Master Distributor of Instrumentation,
Controls, and Engineered Solutions for
Industrial and OEM Applications


Kodiak's 200 series pressure gauges are designed to meet the demands of heavy duty industrial applications. This series gauge is commonly used on hydraulic and pneumatic applications, pumps, compressors, chillers, or any other application that has vibration or needs a hermetically sealed industrial pressure gauge. The KC203 gauge utilizes a U-Clamp panel mount design.

Specifications

Dial Sizes:	1.5", 2", 2.5", 4"
Case:	304SS
Wetted Parts:	Brass/Bronze
Bezel:	Crimped
Lens:	Polycarbonate
Pointer:	Black Aluminum
Connection:	Center Back Mount with U-Clamp 1.5" Dial - 1/8" NPT 2" Dial - 1/8" or 1/4" NPT 2.5" Dial - 1/4" NPT 4" Dial - 1/4" or 1/2" NPT
Scale:	Standard: PSI/BAR (x100 = kPa)
Accuracy:	1.5" & 2" - 3-2-3% 2.5" - 1.6% 4" - 1.6%
Fill:	Glycerin (Standard), Dry Available
Temperature:	Dry: -30°F/180°F Filled: 20°F/160°F



	Unit	A	B	C	D	E	F	G
1.5" Dial	IN	1.88	1.06	0.89	1.95	1/8" NPT	2.63	1.63
	MM	48	27	23	50		67	42
2" Dial	IN	2.23	1.09	0.71	1.99	1/8" or 1/4" NPT	2.81	2.00
	MM	57	28	23	51		72	51
2.5" Dial	IN	2.65	1.21	0.91	2.12	1/4" NPT	3.48	2.44
	MM	68	31	23	54		98	61
4" Dial	IN	4.32	1.63	1.14	2.77	1/4" or 1/2" NPT	5.20	3.87
	MM	110	42	29	71		132	98

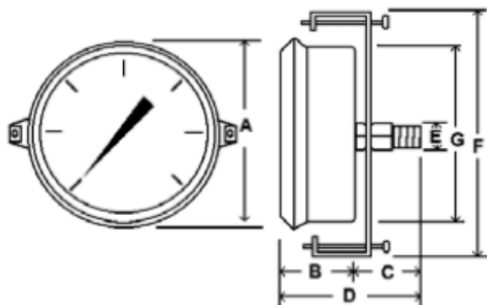

Options*

- Custom Dials
- Special Fill Fluid
- Special Connection Threads (BSP, SAE, etc.)
- Glass Lens
- NIST Certificates of Calibration

*Lead times and minimum orders may apply

Example:

KC203 L 15 8 30

Fill:	Dial Size:	Thread Size:	Ranges:
L = Glycerin	15 = 1.5"	8 = 1/8" NPT	15 psi 3000 psi
D = Dry	20 = 2"	Blank = 1/4" NPT	30 psi 4000 psi
S = Silicone	25 = 2.5"	2 = 1/2" NPT	60 psi 5000 psi
	40 = 4"		100 psi 6000 psi
			160 psi 10000 psi
			200 psi 30" Hg Vac
			300 psi 30" Hg/15 psi
			400 psi 30" Hg/30 psi
			500 psi 30" Hg/60 psi
			600 psi 30" Hg/100 psi
			1000 psi 30" Hg/150 psi
			1500 psi 30" Hg/300 psi
			2000 psi